

# **Sub-LVDS Signaling Using Lattice Devices**

# **Technical Note**



#### **Disclaimers**

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS, with all faults, and all associated risk is the responsibility entirely of the Buyer. The information provided herein is for informational purposes only and may contain technical inaccuracies or omissions, and may be otherwise rendered inaccurate for many reasons, and Lattice assumes no obligation to update or otherwise correct or revise this information. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. LATTICE PRODUCTS AND SERVICES ARE NOT DESIGNED, MANUFACTURED, OR TESTED FOR USE IN LIFE OR SAFETY CRITICAL SYSTEMS, HAZARDOUS ENVIRONMENTS, OR ANY OTHER ENVIRONMENTS REQUIRING FAIL-SAFE PERFORMANCE, INCLUDING ANY APPLICATION IN WHICH THE FAILURE OF THE PRODUCT OR SERVICE COULD LEAD TO DEATH, PERSONAL INJURY, SEVERE PROPERTY DAMAGE OR ENVIRONMENTAL HARM (COLLECTIVELY, "HIGH-RISK USES"). FURTHER, BUYER MUST TAKE PRUDENT STEPS TO PROTECT AGAINST PRODUCT AND SERVICE FAILURES, INCLUDING PROVIDING APPROPRIATE REDUNDANCIES, FAIL-SAFE FEATURES, AND/OR SHUT-DOWN MECHANISMS. LATTICE EXPRESSLY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY OF FITNESS OF THE PRODUCTS OR SERVICES FOR HIGH-RISK USES. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

#### **Inclusive Language**

This document was created consistent with Lattice Semiconductor's inclusive language policy. In some cases, the language in underlying tools and other items may not yet have been updated. Please refer to Lattice's inclusive language FAQ 6878 for a cross reference of terms. Note in some cases such as register names and state names it has been necessary to continue to utilize older terminology for compatibility.



# **Contents**

Contents	3
Abbreviations in This Document	4
1. Introduction	5
2. Differences between LVDS and Sub-LVDS Signals	6
References	12
Technical Support Assistance	13
Revision History	14
Figures	
Figure 2.1. Sub-LVDS Output Driving a Lattice Device Input	6
Figure 2.2. Typical Differential Input Simulation Waveform	7
Figure 2.3. < 70 mV Differential Input Waveform for Hardware Test	8
Figure 2.4. Typical Differential Output Waveform > 200 mV from Hardware Test	8
Figure 2.5. Lattice Device Generating a Sub-LVDS Signal Level – LatticeXP2, LatticeECP3, ECP5/ECP5-5G, Lattice Nexu	JS
Platform, Lattice MachXO5-NX family, Lattice Avant, and Lattice Nexus 22	9
Figure 2.6. Lattice Device Generating a Sub-LVDS Signal Level – MachXO2, MachXO3L/LF, and MachXO3D	10
Figure 2.7. Lattice Device Generating a Low Noise Sub-LVDS Signal – LatticeXP2, LatticeECP3, ECP5/ECP5-5G, Lattice	<u>:</u>
Nexus Platform, Lattice MachXO5-NX family, Lattice Avant, and Lattice Nexus 2	11
Figure 2.8. Lattice Device Generating a Low Noise Sub-LVDS Signal – MachXO2, MachXO3L/LF, and MachXO3D	11
Tables	
Table 2.1. Sub-LVDS Output Signal Voltages and LVDS Input Specifications	7
Table 2.2. Sub-LVDS Output Voltages for Rs and Rp 1% Resistor Values	10



# **Abbreviations in This Document**

A list of abbreviations used in this document.

Abbreviation	Definition
BGA	Ball Grid Array
LVCMOS	Low-Voltage Complementary Metal Oxide Semiconductor
LVDS	Low-Voltage Differential Signaling
РСВ	Printed Circuit Board



# 1. Introduction

Sub-LVDS is a reduced-voltage form of LVDS signaling. This technical note summarizes the main differences between sub-LVDS and LVDS, to show how Lattice FPGA devices can support the sub-LVDS I/O standard. This knowledge can be applied to the Lattice data sheets to confirm compatibility when selecting I/O types to implement sub-LVDS solutions with Lattice devices.




# 2. Differences between LVDS and Sub-LVDS Signals

The following Lattice devices include the LVDS I/O types:

- ECP5™/ECP5-5G™
- LatticeECP3™
- LatticeXP2™
- MachXO2™
- MachXO3L™
- MachXO3LF™
- Lattice Nexus<sup>™</sup> platform
  - CrossLink™-NX
  - CrossLink™-NX-33
  - CrossLinkU™-NX
  - Certus<sup>™</sup>-NX
  - CertusPro™-NX
  - MachXO5™-NX family
- Lattice Avant™
- Lattice Nexus 2

Sub-LVDS is different from LVDS in which the differential and common mode signal levels are reduced. A sub-LVDS output driver can directly drive an LVDS input buffer with sufficient margin, such as those found on Lattice FPGAs, as shown in Figure 2.1.

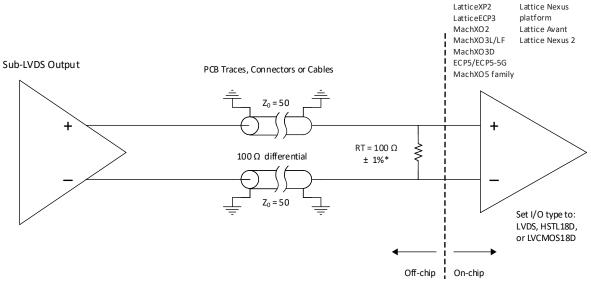

<sup>\*</sup> The LatticeXP2, LatticeECP3, MachXO3, MachXO3L/LF, MachXO3D, ECP5/ECP5-5G, Lattice Nexus platform, MachXO5 family and Lattice Avant devices can be configured to do the  $100\,\Omega$  termination on-chip.

Figure 2.1. Sub-LVDS Output Driving a Lattice Device Input



Table 2.1 shows sub-LVDS output signal voltages, and the Lattice device LVDS input specifications. The table below shows that the Lattice device LVDS inputs can receive sub-LVDS output signals. The first column, labelled ""

Table 2.1. Sub-LVDS Output Signal Voltages and LVDS Input Specifications

Sub-LVE Output Character	t	ECP5/ ECP5-5G LVDS Input	LatticeECP3 LVDS Input	LVDS	MachXO2, MachXO3L/ MachXO3LF and MachXO3D LVDS Input	MachXO2 HSTL18D_I Input	MachXO3L/LF and MachXO3D LVCMOS18D Input	Lattice Nexus Platform LVDS Input	Avant LVDS Input	Nexus 2 LVDS Input	Unit
Common Mode Voltage Min (Vcm)	0.75	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.03	ı	V
Common Mode Voltage Max (Vcm)	1.05	2.35	2.35	2.35	2.0	1.1	1.1	1.55	1.4	-	<b>V</b>
Differential Voltage Min (Vod)	100	100	100	100	100	100	100	100	250	I	mV
Differential Voltage Max (Vod)	200	2400	2400	2400	2050	1105	1105	1600	450	ı	mV

In some instances, an LVDS receiver is expected to detect signals below the sub-LVDS minimum differential output level of 100 mV. Based on simulation and characterization tests, the LVDS inputs for LatticeXP2, LatticeECP3, and ECP5/ECP5-5G family devices can detect differential signal levels down to 70 mV. Figure 2.2 shows a typical simulation waveform of an ECP5/ECP5-5G device, a LatticeECP3, and a LatticeXP2 differential input buffer that is able to properly detect the input differential at 70 mV. Figure 2.3 and Figure 2.4 show a similar hardware test condition that shows the input and output signals associated with the differential input voltage at 70 mV.

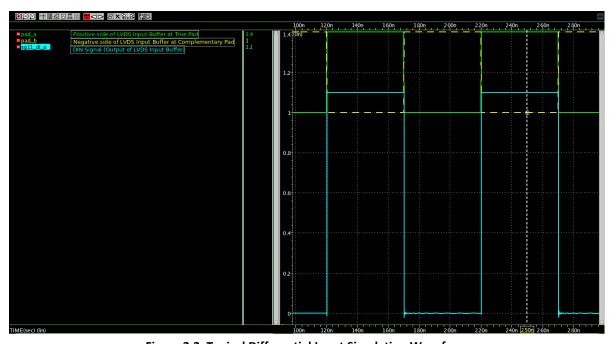


Figure 2.2. Typical Differential Input Simulation Waveform



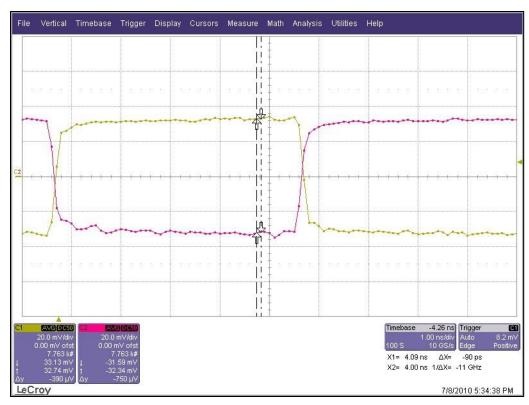


Figure 2.3. <70 mV Differential Input Waveform for Hardware Test



Figure 2.4. Typical Differential Output Waveform > 200 mV from Hardware Test



When configured as an HSTL18D input, LatticeECP3 and LatticeXP2 devices have the same input differential and common mode performance as the LVDS input type. As a result, HSTL18D can be set in the Lattice design software to represent a sub-LVDS input. On the MachXO2, the HSTL18D inputs have a different specification compared to the LVDS inputs. For the MachXO3L and MachXO3D devices, it would be the LVCMOS18D inputs that supports the sub-LVDS specifications. See Table 2.1 for values and IO\_TYPES to be used for each of the devices.

Sub-LVDS, like LVDS, requires  $100~\Omega$  termination at the receiver but does not specify that the termination is internal or external to the receiver. Avant, the Nexus platform, and ECP5/ECP5-5G devices have internal  $100~\Omega$  differential termination that the user can select. The LatticeECP3 device has built-in differential termination with selectable values of 80, 100, 120, or off. The internal differential  $100~\Omega$  terminations are only available for inputs on the left and right sides of the device. See LatticeECP3 Family Data Sheet (DS1021) for additional information about on-die termination. The MachXO2, MachXO3L/LF, and MachXO3D devices support on-chip  $100~\Omega$  (nominal) input differential termination on the bottom edge. The LatticeXP2 device has no internal input termination, so it requires external  $100~\Omega$  differential input terminations. When external termination is used, the resistor should be either 0402 body size or surface mount resistor packs, placed as close as possible to the input BGA balls on the device.

If you would like to generate sub-LVDS output signals using LatticeECP3 and LatticeXP2 devices, it is recommended to set the I/O type to SSTL18D\_II, and add the resistor network shown in Figure 2.5 to emulate a sub-LVDS output type.

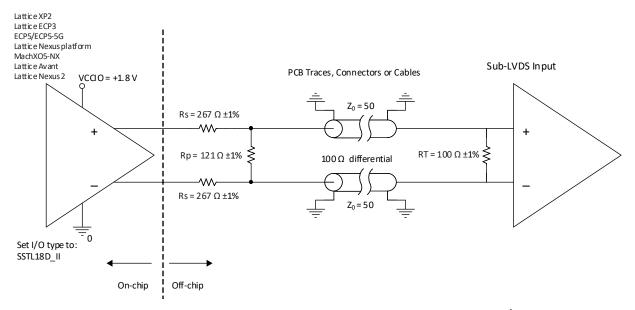


Figure 2.5. Lattice Device Generating a Sub-LVDS Signal Level – LatticeXP2, LatticeECP3, ECP5/ECP5-5G, Lattice Nexus Platform, Lattice MachXO5-NX family, Lattice Avant, and Lattice Nexus 2



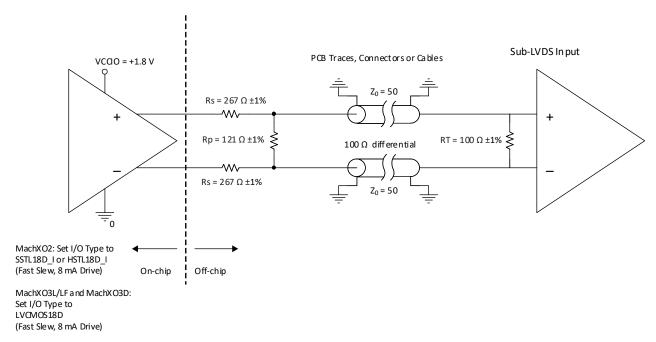


Figure 2.6. Lattice Device Generating a Sub-LVDS Signal Level – MachXO2, MachXO3L/LF, and MachXO3D

The resistor network shown in Figure 2.5 and Figure 2.6 can produce Vod = 156 mV at the RT termination. Table 2.2 lists various resistor values that can be used to produce other output voltage levels smaller or larger than 156 mV, while maintaining a  $100~\Omega$  differential source termination.

Table 2.2. Sub-LVDS Output Voltages for Rs and Rp 1% Resistor Values

Vod (mV)	Rs (Ω)	Rp (Ω)
104	412	113
136	309	118
156	267	121
174	237	124
207	196	130

The Vcm value for the network shown in Figure 2.5 and Figure 2.6 is half the VCCIO voltage by default. The Rp and Rs resistors should be placed as close as possible to the Lattice device output pins and should be either 0402 body size or surface mount resistor packs with minimal stub length traces to the resistors.

If you need the lowest common mode output noise, you can get the best performance with the output resistor network shown in Figure 2.7 and Figure 2.8. The main difference being that the original Rp resistor has been split into two resistors of value one-half Rp each with their center connection to a floating, or a 0.9 V VTT, plane island that is itself bypassed to the GND plane. The GND plane should cover the entire extent of the PCB with no major line or area breaks in the plane.



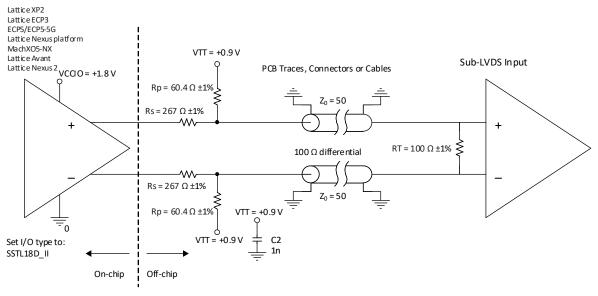


Figure 2.7. Lattice Device Generating a Low Noise Sub-LVDS Signal – LatticeXP2, LatticeECP3, ECP5/ECP5-5G, Lattice Nexus Platform, Lattice MachXO5-NX family, Lattice Avant, and Lattice Nexus 2

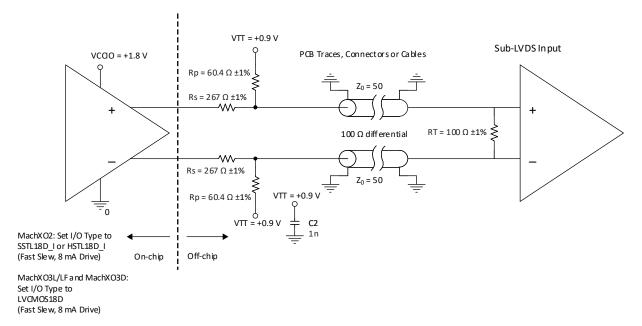


Figure 2.8. Lattice Device Generating a Low Noise Sub-LVDS Signal – MachXO2, MachXO3L/LF, and MachXO3D



# References

- ECP5 and ECP5-5G Devices Web Page
- LatticeECP3 Devices Web Page
- LatticeXP2 Devices Web Page
- MachXO2 Devices Web Page
- MachXO3 Devices Web Page
- CrossLink-NX Devices Web Page
- Certus-NX Devices Web Page
- CertusPro-NX Devices Web Page
- MachXO5-NX Devices Web Page
- Lattice Avant Devices Web Page
- Lattice Nexus 2 Devices Web Page
- Lattice Insights for Training Series and Learning Plans



# **Technical Support Assistance**

Submit a technical support case via www.latticesemi.com/techsupport. For frequently asked questions, refer to the Lattice Answer Database at https://www.latticesemi.com/Support/AnswerDatabase.



# **Revision History**

## Revision 2.6, December 2024

Section	Change Summary			
All	Minor editorial fixes.			
Inclusive Language	Added this section.			
Differences between LVDS and Sub-LVDS Signals	Added Lattice Nexus 2 in the device list.			
	Updated description.			
	• Added MachXO5-NX and Lattice Nexus 2 in Figure 2.1, Figure 2.5, and Figure 2.7.			
	Updated Table 2.1. Sub-LVDS Output Signal Voltages and LVDS Input Specifications			
	Updated caption for Figure 2.5 and Figure 2.7.			
References	Updated links.			

#### Revision 2.5, October 2023

Section	Change Summary
Disclaimers	Updated.
Differences between LVDS and Sub-LVDS Signals	Replaced CrossLink-NX-33U with CrossLinkU-NX.

#### Revision 2.4, August 2023

Section	Change Summary
Differences between LVDS and Sub-LVDS Signals	Added CrossLink-NX-33U support.
References	Newly added section.

#### Revision 2.3, November 2022

Section	Change Summary
Differences between LVDS and Sub-LVDS Signals	Added Avant devices support.

## Revision 2.2, October 2022

Section	Change Summary		
Introduction	General update.		
Differences between LVDS and	Added MachXO5-NX devices support.		
Sub-LVDS Signals	General update.		

## Revision 2.1, June 2022

Section	Change Summary
Differences between LVDS and Sub-LVDS Signals	Added CrossLink-NX-33 support.

## Revision 2.0, July 2021

Section	Change Summary
Differences between LVDS and Sub-LVDS Signals	In Table 2.1:  Merged the table header for the first two columns to Sub-LVDS Output Characteristic.  Added the LVDS Input Spec column.

© 2024 Lattice Semiconductor Corp. All Lattice trademarks, registered trademarks, patents, and disclaimers are as listed at www.latticesemi.com/legal.

All other brand or product names are trademarks or registered trademarks of their respective holders. The specifications and information herein are subject to change without notice.



#### Revision 1.9, June 2021

Section	Change Summary
All	Changed Certus-NX/CrossLink-NX to Lattice Nexus platform.
Differences between LVDS and Sub-LVDS Signals	Added MachXO3D support to the description, Figure 2.1, Figure 2.6, Figure 2.8, and Table 2.1.
	• Revised statement to The MachXO2, MachXO3L/LF, and MachXO3D devices support on-chip $100~\Omega$ (nominal) input differential termination on the bottom edge.

## Revision 1.8, June 2020

Section	Ch	ange Summary
All	Ad	ded support for Certus-NX device family.
Differences between LVDS and Sub-LVDS Signals	•	Updated the screenshot of waveform for Figure 2.2 removing ECP5/ECP5-5G, LatticeECP3 and LatticeXP2 from the figure caption.
	•	Changed the figure caption of Figure 2.3 adding < 70 mV.
	•	Changed the figure caption of Figure 2.4 adding > 200 mV.

#### Revision 1.7. December 2019

terision 117, December 2015		
Section	Change Summary	
All	Changed document number from TN1210 to FPGA-TN-02028.	
	Added support off CrossLink-NX device family.	
	Updated document template.	
	Updated document links.	
Technical Support Assistance	Updated this section.	

## Revision 1.6, October 2015

Section	Change Summary
All	Product name adjustment. Included MachXO3LF device.

#### Revision 1.5, November 2015

Section	Change Summary
All	Added support for ECP5-5G device family.

## Revision 1.4, June 2015

Section	Change Summary
All	Updated Differences Between LVDS and Sub-LVDS Signals section.
Differences between LVDS and	Added MachXO3L/LF in Table 2.1. Sub-LVDS Output Signal Voltages and LVDS Input
Sub-LVDS Signals	Specifications.

#### Revision 1.3, January 2015

Section	Change Summary
All	Added support for MachXO3L device family.

#### Revision 1.2, March 2014

Section	Change Summary
All	Added support for ECP5 device family.

## Revision 1.1, April 2013

Section	Change Summary
All	Added sub-LVDS implementation for MachXO2.

© 2024 Lattice Semiconductor Corp. All Lattice trademarks, registered trademarks, patents, and disclaimers are as listed at www.latticesemi.com/legal.

All other brand or product names are trademarks or registered trademarks of their respective holders. The specifications and information herein are subject to change without notice.



## Revision 1.0, July 2010

Section	Change Summary
All	Initial release.



www.latticesemi.com